


NOTES:

- 1. MILLING SHALL BE DONE TO ATTAIN REQUIRED SLOPE IN CROWN SECTIONS
- 2. EXISTING S.E. AND S.E. TRANSITIONS SHALL BE MAINTAINED UNLESS OTHERWISE SHOWN ON THE PLANS.
- 3. MILLING TO THE BOTTOM OF WHEEL RUTS SHALL NOT BE NECESSARY UNLESS REQUIRED TO OBTAIN SLOPE OR THE DESIGN DEPTH AT CENTERLINE.
- 4. THE AVERAGE DEPTH OF MILLING IS ESTIMATED TO BE $1/2^{\prime\prime}$ BUT MAY VARY IN ISOLATED LOCATIONS.

BITUMINOUS SURFACE REMOVAL (VARIABLE DEPTH) DETAIL


MATERIAL TO BE REMOVED AND REPLACED IN THE EMBANKMENT IN ACCORDANCE WITH ART. 205.04 OF THE STANDARD SPECIFICATION. COST TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED BECAUSE OF THIS WORK.

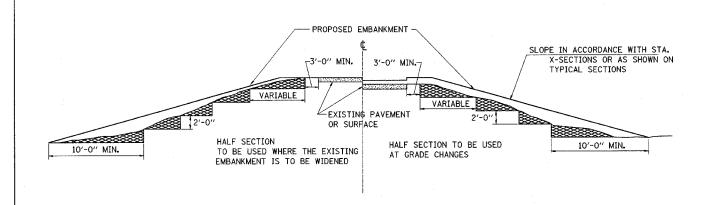

TYPICAL CROSS SECTION SHOWING STEP CONSTRUCTION ON EXISTING FILL

| FiA.P. | SECTION | COUNTY | TOTAL | SHEET | NO. | TOTAL | SHEET | SHEET | NO. | TOTAL | SHEET | SHEET | NO. | TOTAL | SHEET | SH

* 107WRS-1, 107BY, 107BY-1 & 107B-2 CONTRACT NO. 94827

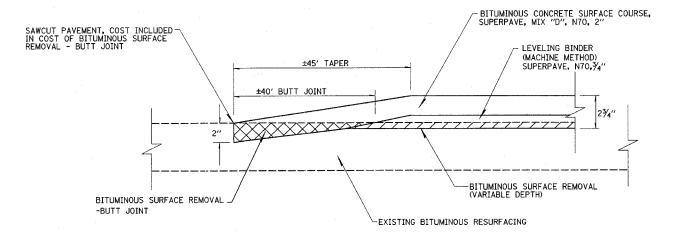


BITUMINOUS SURFACE REMOVAL - BUTT JOINT



BITUMINOUS SURFACE REMOVAL (VARIABLE DEPTH)


BITUMINOUS SURFACE REMOVAL-BUTT JOINT DETAIL



GENERAL NOTES:

THIS WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH APPLICABLE PORTIONS OF STANDARD 606001 AND SECTION 606 OF THE STANDARD SPECIFICATIONS. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER FOOT FOR COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24.

SPECIAL OUTLET FOR COMBINATION CURB AND GUTTER, TYPE B-6.24



PER STD. 606001 SECTION B-B

REVISIONS
NAME DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

MISCELLANEOUS ROADWAY DETAILS SHEET 1 OF 2

DATE 8/02

CHECKED BY BWC

DRAWN BY DIST. 7

DECATUR, ILLINOIS